

Sight Flow Indicators (straight line)

with flanges connecting

PN 16



Bauform 108

Application:

Sight Flow Indicators are used for optical control and the observation of filling and current in pipelines.

Operating conditions:

Working pressure : PN 16

Standard Materials:

Body : WN 1.4404 / 1.4571
 Flanges : DIN 2633; 1.4571
 Covers : Stainless steel
 Screws : A4
 Sight glasses : Borosilicate glass acc. to DIN 7080
 Soda lime glass acc. to DIN 8902
 Gaskets : Graphite (other materials are available on request)

Installation:


Optional. Take care of flow direction

Options:

Other materials
 Sight glass light-fitting
 Spinner or Flap

Ordering example:

Sight flow indicators Bauform 108
 stainless steel, borosilicate glass
 DN 50 PN 16

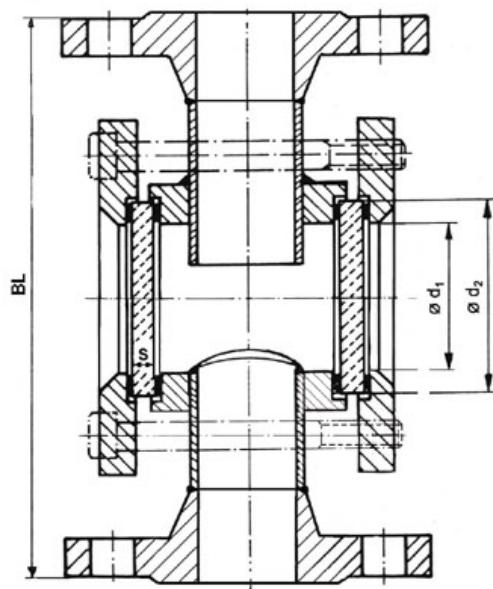

Dimensions:

DN	BL	Glass plate			Screw S	Weight Kg
		Ø d ₁	Ø d ₂	S		
25	160	48	63	10	M 10	6,7
32	180	65	80	12	M 10	8,4
40	200	65	80	12	M 12	8,7
50	230	80	100	15	M 12	10,9
65	290	80	100	15	M 12	12,9
80	310	100	125	20	M 12	18,1

Further sizes on Bauform 112

Modification reserved



AVEMAR cz s.r.o., Lihovarská 10, 716 03 Ostrava - Radvanice
 Tel.: +420 596 232 996, 596 232 997, Fax: +420 596 232 998
 E-mail: avemar@avemar.cz, web: www.avemar.cz