

Sight Flow Indicators (straight line) with heating jacket



Bauform 880-HM

Application:

To keep cold- or heat- loss at sight flow indicators as low as possible, they are surrounded with a heating jacket. Within the resulting cavity, a corresponding medium can flow to avoid cold- or heat- loss.

Dimension:

Body corresponds Bauform 880
Measures see at Bauform 880
With DIN- and ANSI - Flanges
All dimensions and all pressures

Materials:



Body: WN 1.4408
Heating jacket: WN 1.4571

Connections for heating jacket:

Buttweld ends
Inside or outside thread
Flange connection
Screwing

Standard design:

Inside thread acc. to sketch

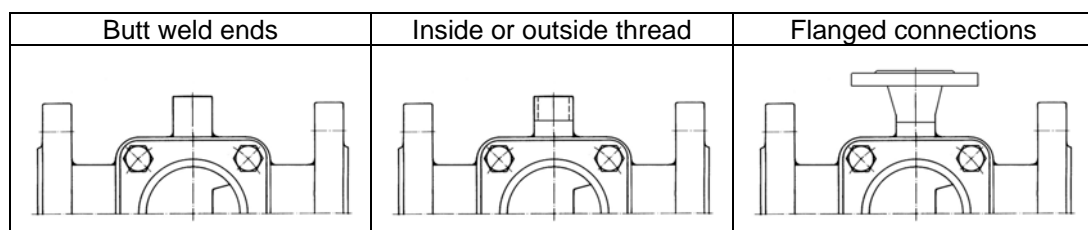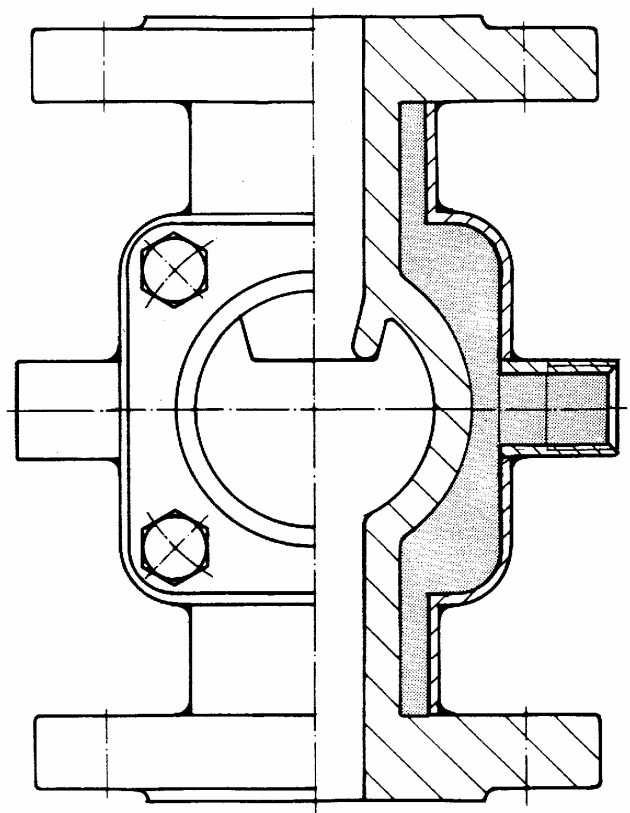

Modifications reserved



AVEMAR cz s.r.o., Lihovarská 10, 716 03 Ostrava - Radvanice
Tel.: +420 596 232 996, 596 232 997, Fax: +420 596 232 998
E-mail: avemar@avemar.cz, web: www.avemar.cz