


# Angle Sight flow indicator

with flanged connection acc. to *DIN*

Steel

Stainless steel

Bauform 920

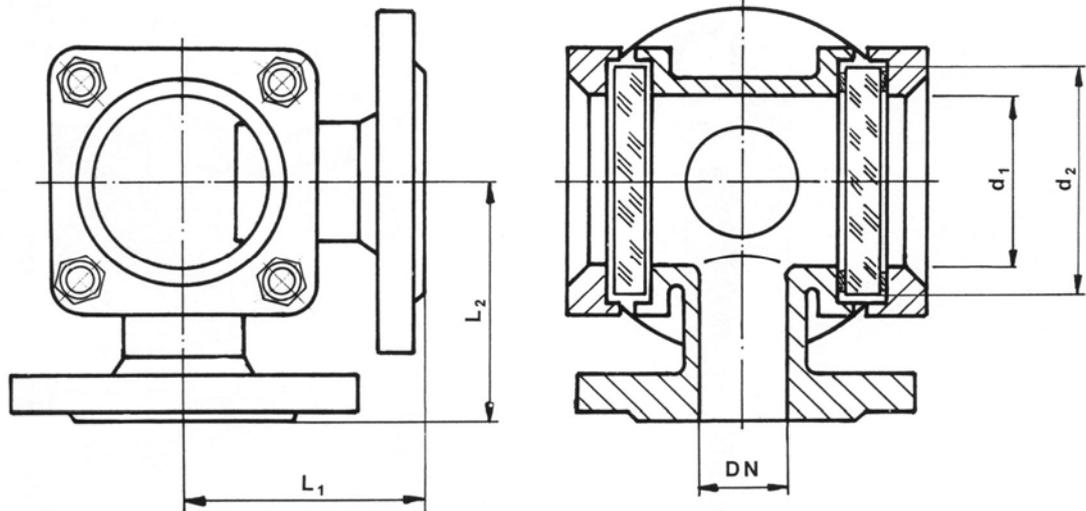

## Application:

The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe lines.

## Construction:

different materials  
all working pressure up to PN 160

## Options:

- with - ANSI flanges
- Extra length
- Different nom. sizes for connection
- Heating jacket
- Sight glass light - fitting
- Special sealing system acc. to DIN 28121
- Special design acc. to customer



## Dimensions:

DN	$L_1 = L_2$	$d_1$	$d_2$
15	90	48	63
20	95	48	63
25	100	65	80
32	105	80	100
40	115	80	100
50	125	100	125
65	145	100	125
80	155	100	125
100	175	125	150

DN 125 - DN 250 on request

Modifications reserved

AVEMAR cz s.r.o., Lihovarská 10, 716 03 Ostrava - Radvanice  
Tel.: +420 596 232 996, 596 232 997, Fax: +420 596 232 998  
E-mail: avemar@avemar.cz, web: www.avemar.cz