

Sight glass level gauge CL150 to 600

Light execution
Reflex, Transparent
Connection top-bottom pivoted
Connection gauge valve to gauge chamber: union
Offset, quick closing

Product group **700**


Type **23**

Sheet: 21

Revision: 1

Date:

02/06

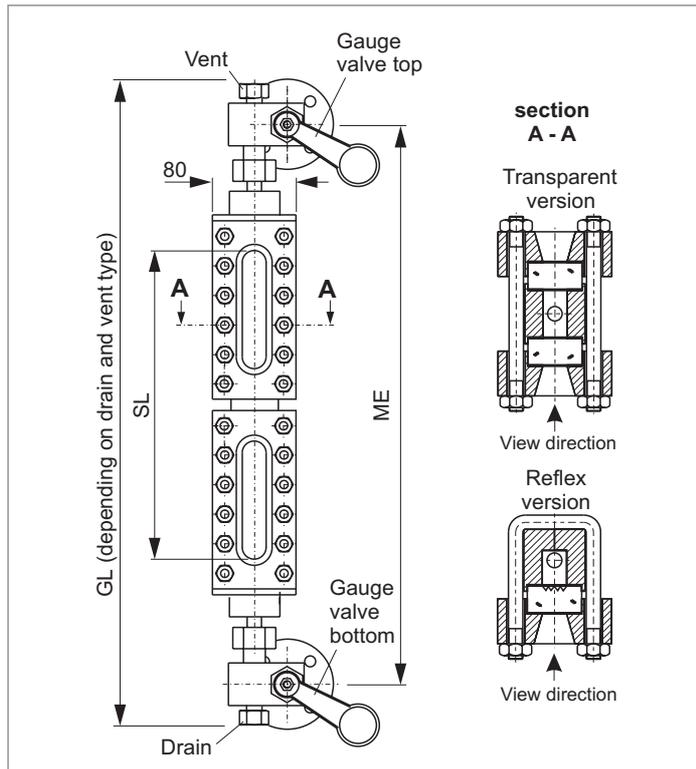

Field of Application

Direct reading liquid level indicator for general applications up to CL600 (depends on glass type). Increased safety with ball check valves.

General Data

Visible length SL: <ME
Body: 40 x 40, Ø40 (for special materials)
Connection gauge valve - body: union
Gauge valve types: see data sheet 760.58
Actuation: quick closing
Material glass plates acc. to DIN 7081: Borosilicate
Material media wetted parts: CS, SS
Depending on delivery situation material can vary.
Types with special materials e. g. Hastelloy, Monel etc. are available.
Weight
- basic weight (glass type 4-9)
- reflex / transparent: 10.5-14.0 kg / 13.2-17.5 kg
- per segment (glass type 4-9)
- reflex / transparent: 7.0-11.8 kg / 8.2-12.8 kg
Depending on execution weight can vary.

Design Data

Design pressure/-temperature see derating
- D40, reflex: data sheet BG00R0
- 40 x 40, reflex, transparent: data sheet BG00R1

Further Data

Connection gauge valve - body: see 700.VAR
Process connection: see 700.VAR
Vent: see 700.VAR
Drain: see 700.VAR


Accessories

Glass protection etc.: see accessories
Frosts protection: see accessories
Illumination: see accessories
Scale: see accessories
Heating: see accessories

CS (= carbon steel) and SS (= stainless steel type 316SS) are materials suitable for Pressure Vessels according to EN or ASME.

Subject to alterations

Orientation of gauge valve and operation

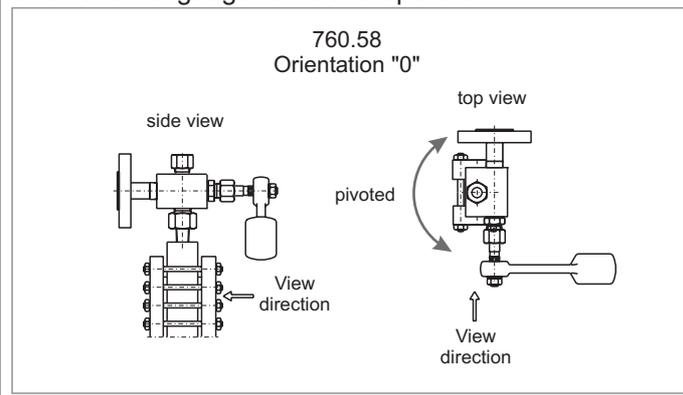

Ordering no.

7 0 0 2 3 X X 5 8 0 X X - X X - X X X X X X X X X - X X X X		see 700.VAR	ME [mm]
bridging	without	0	results from ME
	with	1	X spec. glass types
glass window	Reflex (DIN 7081)	1	0
	Transparent (DIN 7081)	2	1
gauge valve	760.58	5 8 0	see data sheet 760.58

PHÖNIX

Messtechnik GmbH
Salzschlierfer Straße 13
D-60386 Frankfurt/M.
Tel. +49/69/41 67 42 -20
Fax +49/69/41 67 42 - 29
sales@phoenix-mt.com
www.phoenix-mt.com

PHÖNIX