


Indicator

Indicator for magnetically operated level gauges,
with float defect control
Temperatures from -196 °C to 0 °C
for frequent and fast changing level
for use in frost protection and corrosive ambient
close formation of indicating elements

Product group	710		
Type	AVG2		
Sheet:	1/1	Revision:	1
Date:	8/03		

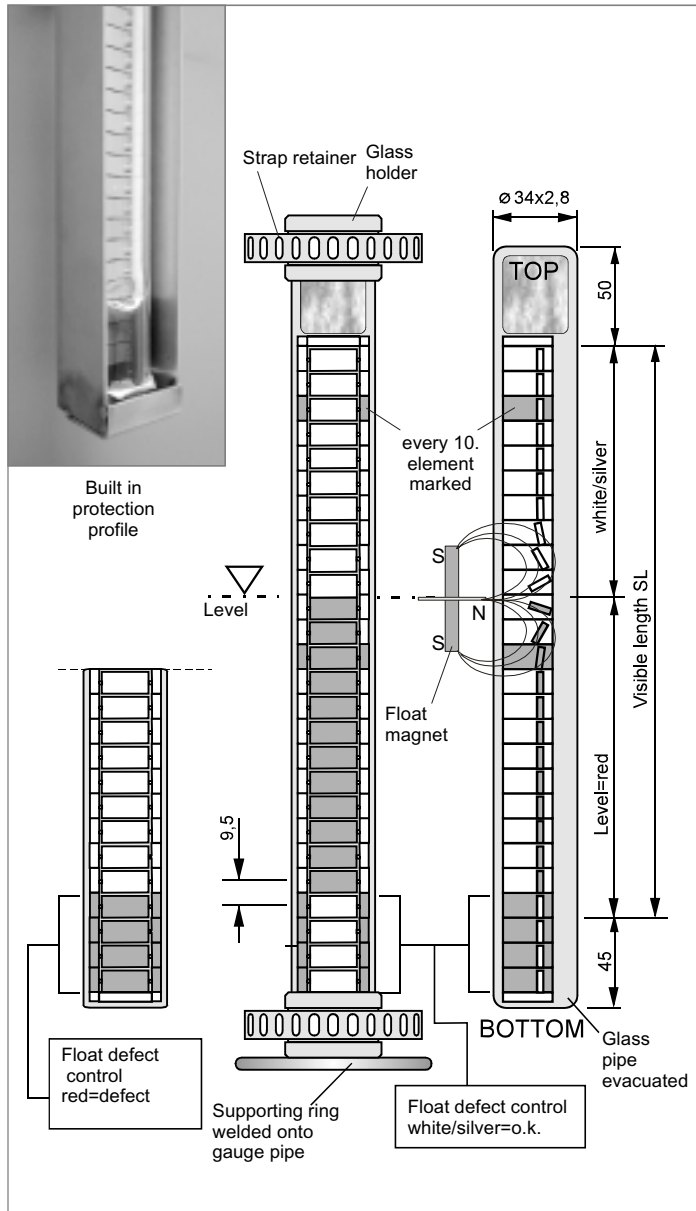

Field of Application

The indicator is for indirect reading liquid level in magnetically controlled level gauges.

General Data

Medium: separated from indicator
Position: any around the pipe
Sight angle: 150°
Visible length: up to 3 m one piece, above splitted
Float defect control: via the lowest 3 elements
Indicating element: Metal laminar Z-shapes borne in plastics modules

Material

Pipe evacuated: Duran 50
Indicating laminars: magnetized ferromagnetic steel
Plastics modules: Polycarbonate

Design Data

Ambient temperature: -65 to +125 °C
Corrosive ambient: IP 68 suited

Accessories

Protection profile: Aluminium
Frost protection: PMM
Straightening magnet: included

subject to alterations

Ordering no.

B	G	1	0	A	V	G	2	X	X	X	X
								X	X	X	
								X	X	X	S
								X	X	S	P
								X	X	X	G

without float defect control
with float defect control
with float defect control and frost protection
indicating elements yellow - black, with float defect control

PHÖNIX
Messtechnik GmbH
Salzschlirfer Straße 13
D-60386 Frankfurt/M.
Tel. +49/69/41 67 42 -20
Fax +49/69/41 67 42 - 29
sales@phoenix-mt.com
www.phoenix-mt.com

PHÖNIX